

High-quality modules, specially designed for exhibitions

exposupply

Lightbox Modules



magistor

STRAAL- & VERSPANINGSTECHNIEK

Magistor
hooguit een belletje
van u vandaan
magistor

magistor



Lightbox modules for all kinds of applications

Exposupply's lightbox modules are designed for versatile use and seamless integration. Whether you opt for a shallow lightbox with backlit modules, an existing profile with edgelit modules, or a fully customised solution, our lightbox modules always deliver.

Choose the system that truly enhances your project.

✓ *ALUVISION*

✓ *BEMATRIX*

✓ *OCTANORM*

✓ *PIXLIP*

✓ *EFKA*



Delphi
Technologies



Delphi
Technologies



to make a difference

Delphi Technologies Driven to Excellence



Continental

Delphi
Technologies

Which module do I need?

Select the module for the right application.

Do you have a question?


Please contact us!

Info@exposupply.com

[+31 \(0\)85 273 64 21](tel:+3120852736421)



Type	LONA	VICI	UVAL	YONI
				
	 PLUG & PLAY	 SUPER BRIGHT	 ROBUST	 BACKLIT
Maximum range	3000 mm	4000 mm	3000 mm	80 mm
Mounting	Edgelit	Edgelit	Edgelit	Backlit
Number to connect	Max. 20	Max. 8	Max. 10	Max. 8
Beam angle	45° x 10°	39° x 13°	45° x 15°	170°
Driver required	Intergrated	External	External	External

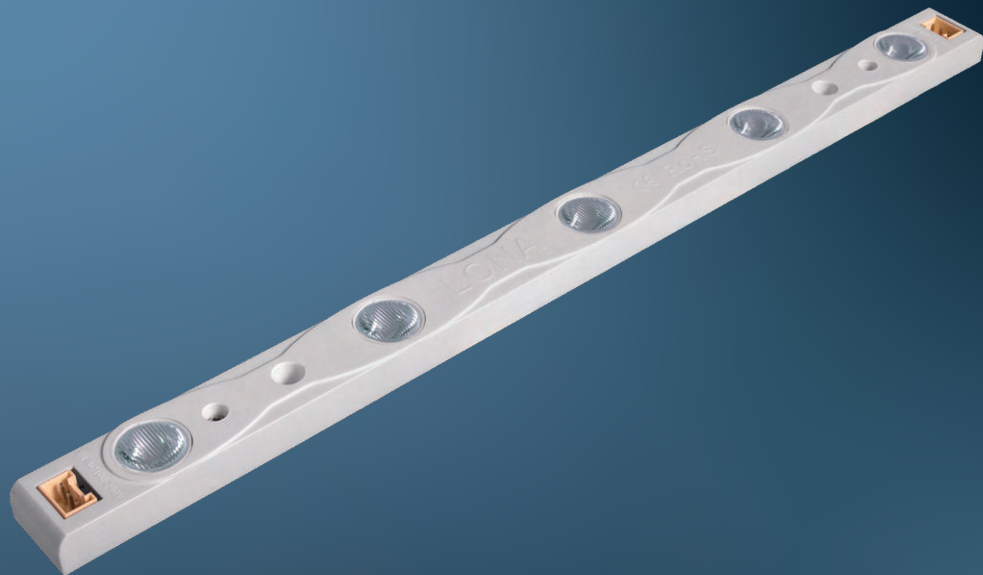

LONA

Plug-and-play edgelit module with integrated adapter.
Easy to install without the hassle of wires
and seperate drivers.



EU Plug | 100 -240 V

Intergrated driver

- ✓ **LINKABLE UP TO 20 TIMES**
- ✓ **PLUG & PLAY**
- ✓ **3 METER RANGE**
- ✓ **ROBUST**



More information

Specifications

Power	15W	Input voltage	AC 100 - 240V
Luminous flux	1450 lm	Size	393 x 26 x 14 mm
Depth lightbox	100 - 150 mm	Mounting	Edgelit
Max. range	3000 mm	Beam angle	45° x 10°

PLY

ALU PANEL

Ready-cut
No waste



Ready-cut dimensions

1481 x 985 mm 1977 x 985 mm
2473 x 985 mm 2969 x 985 mm

Designed and Built by
expoteam

EXPOLED Lightbox



LONA
AC 240V

NEW TECHNOLOGY
Integrated driver



LONA

Integrated driver
Plug & Play

VICI

Up to 2.700 lumens
Adjustable height
3 power levels

Display spots



Aluminium
Bohrer



Octanorm
Modul
Syma



Panel



Linkable



Wieland or IE


Wehr als nur Messebau

buwerk.de


CADT

CADT



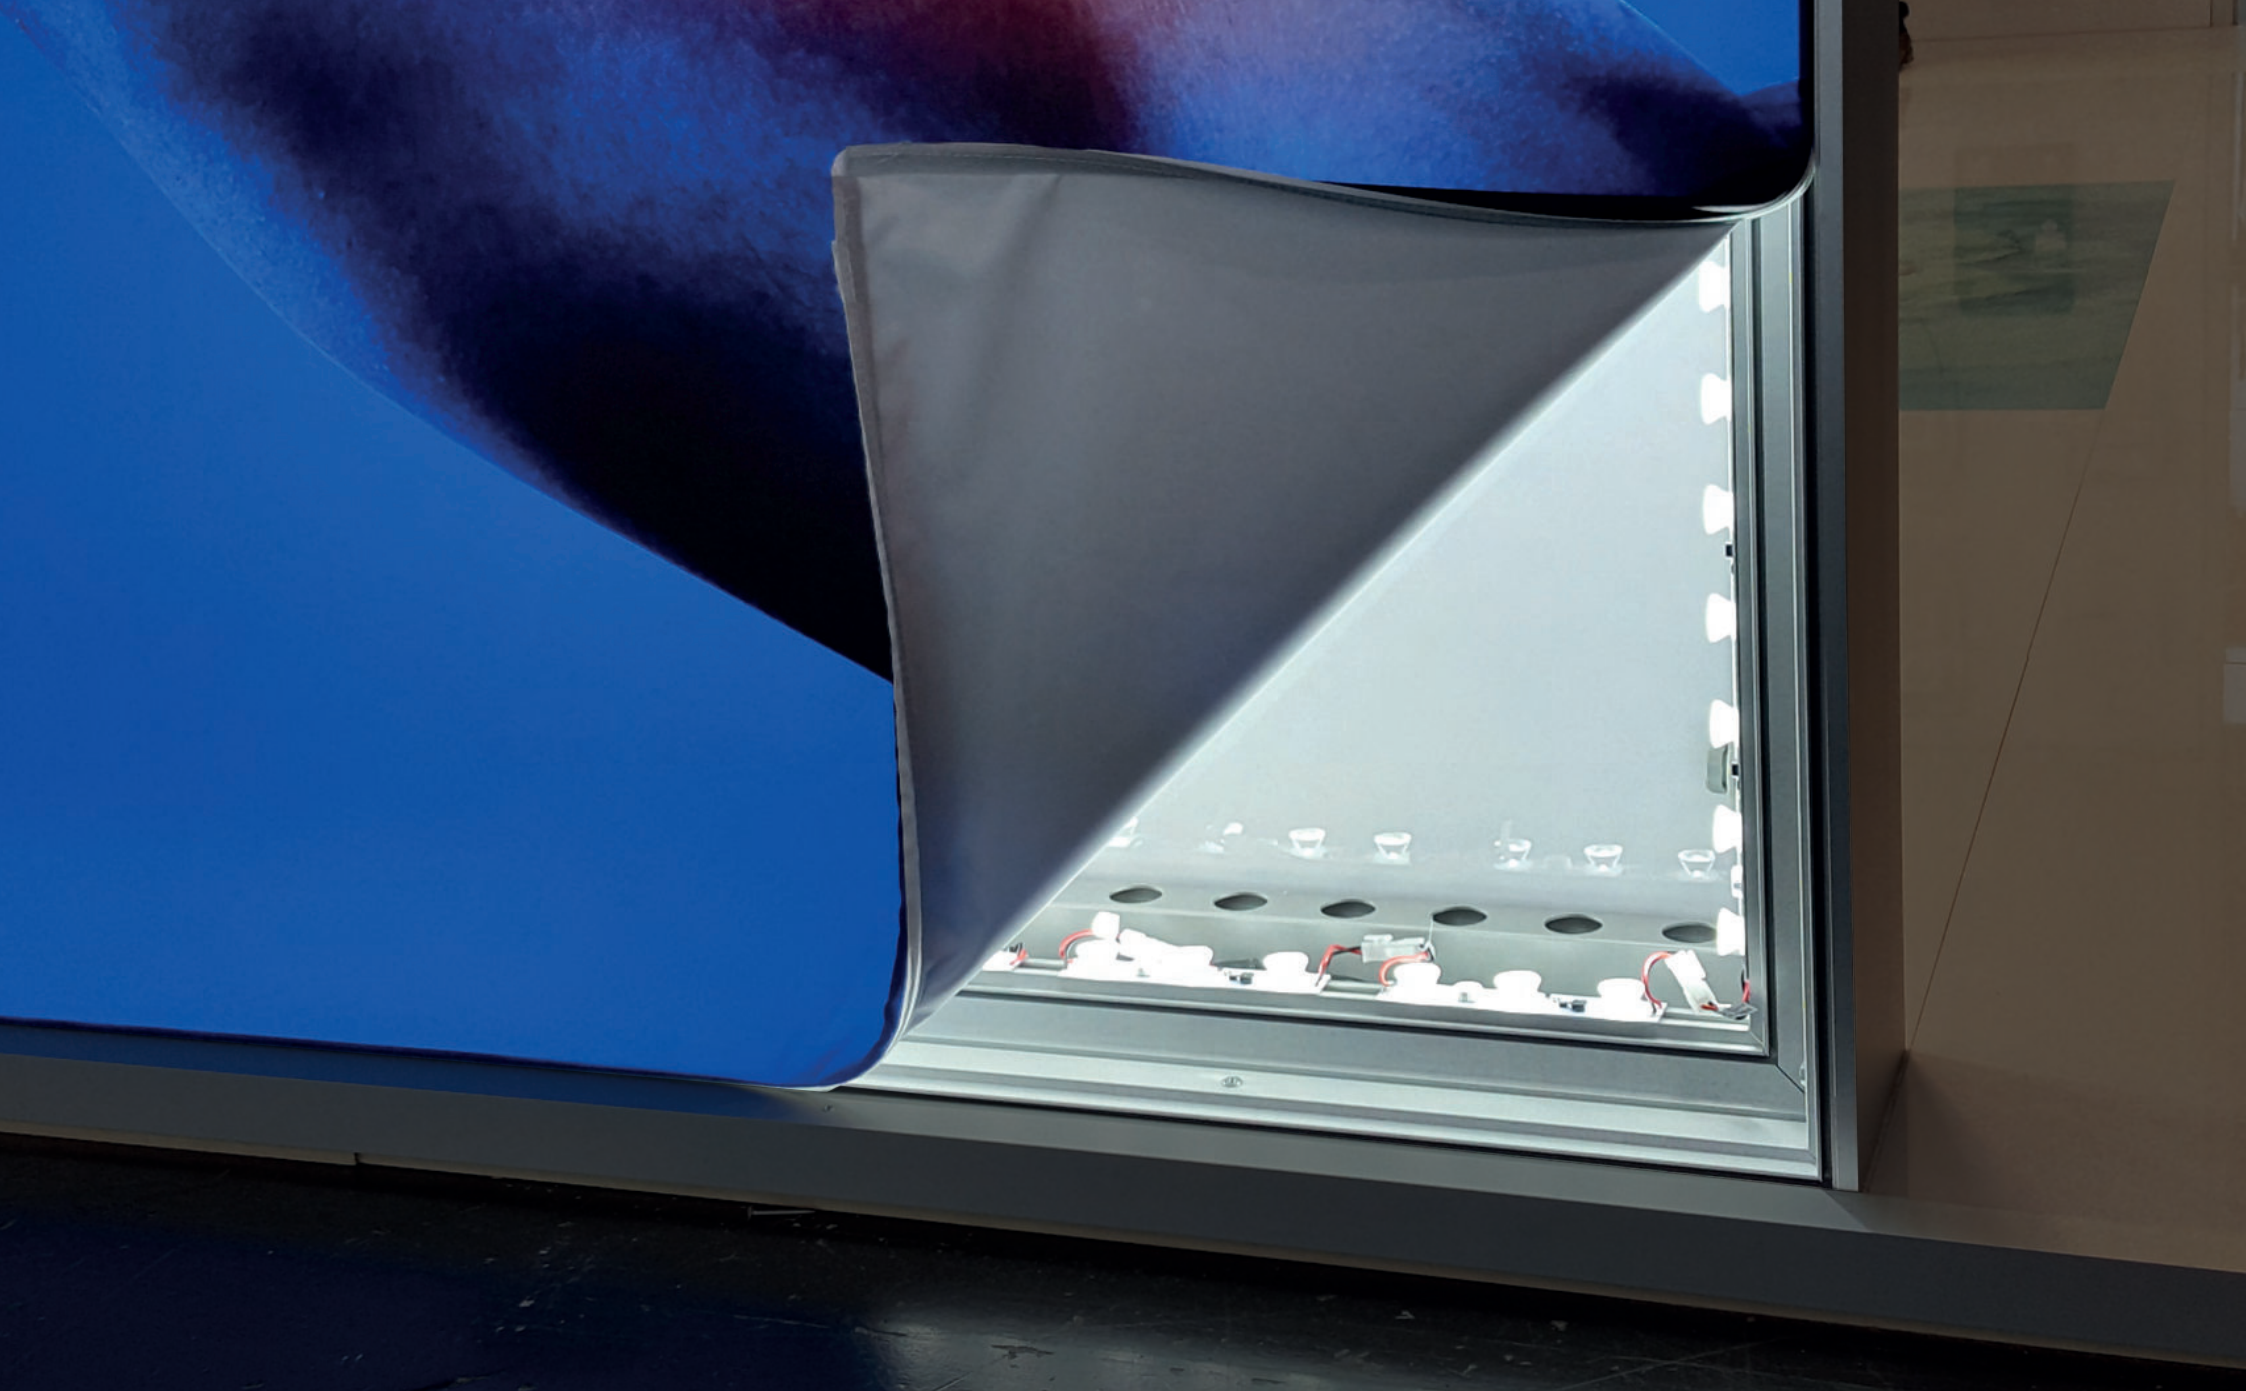

LONA connection & accessories

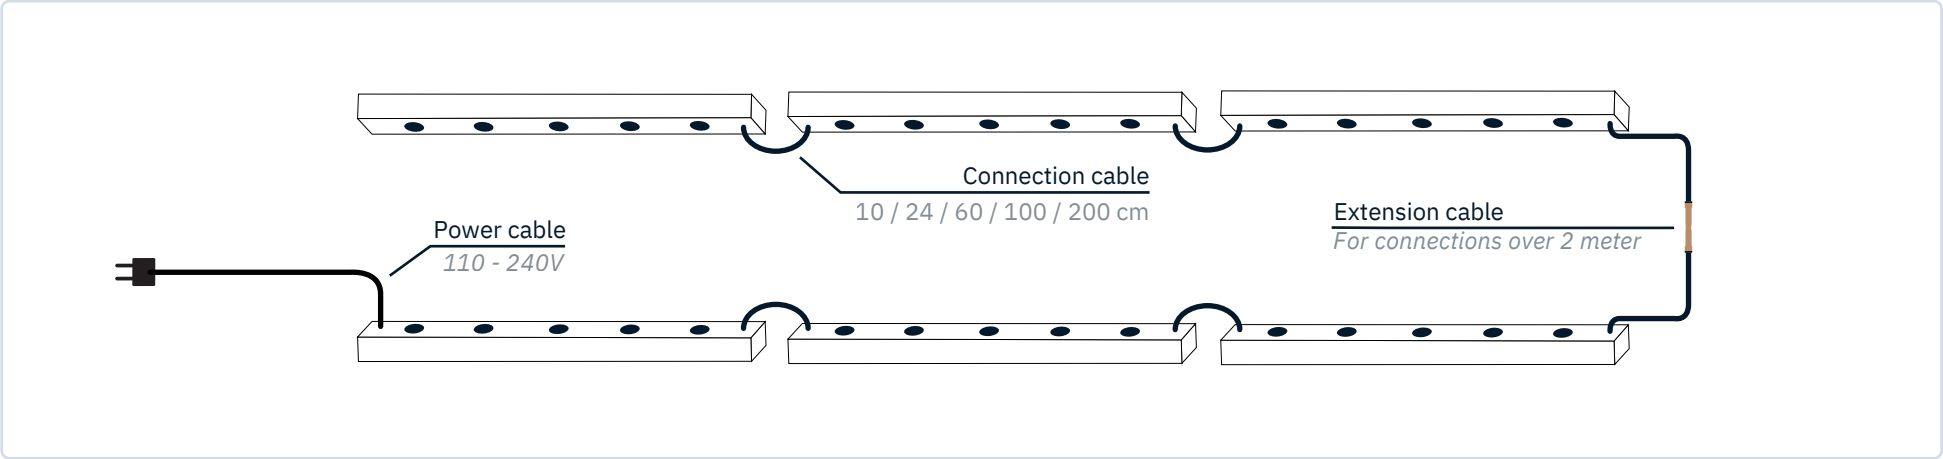

Connection cable LONA
(10 / 24 / 60 / 100 / 200 cm)



Extension cable LONA
(24 cm)


Mounting :



Hammer nut with
Screw



Screw

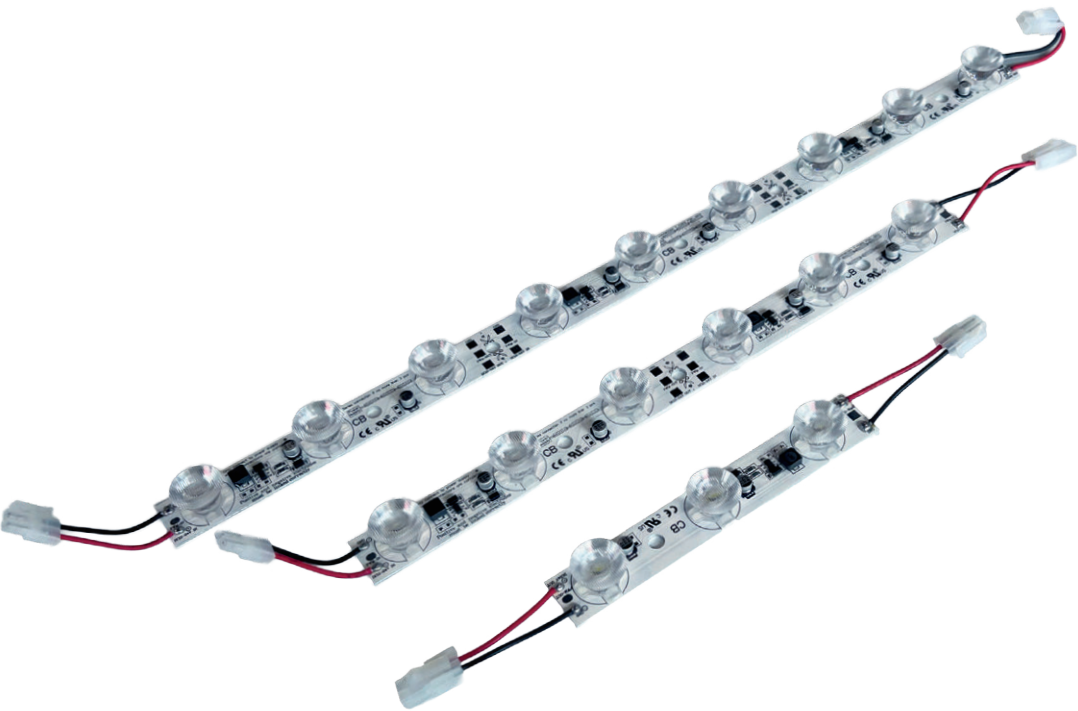

VICI

Powerful edgelit module with a conical lens for optimal light distribution. With VICI, a lightbox can be brightly illuminated up to 4 metres.



2- pins Connection - VICI

Available in: 3 / 6 / 9 Leds


- ✓ CONICAL LENSES
- ✓ POWERFUL MODULES
- ✓ 3 DIFFERENT LENGTHS



More information

Specifications

Power	27W	Input voltage	DC 24V
Luminous flux	2700 lm	Size	570 x 23 x 18 mm
Depth lightbox	100 - 150 mm	Mounting	Edgelit
Max. range	4000 mm	Beam angle	39° x 13°

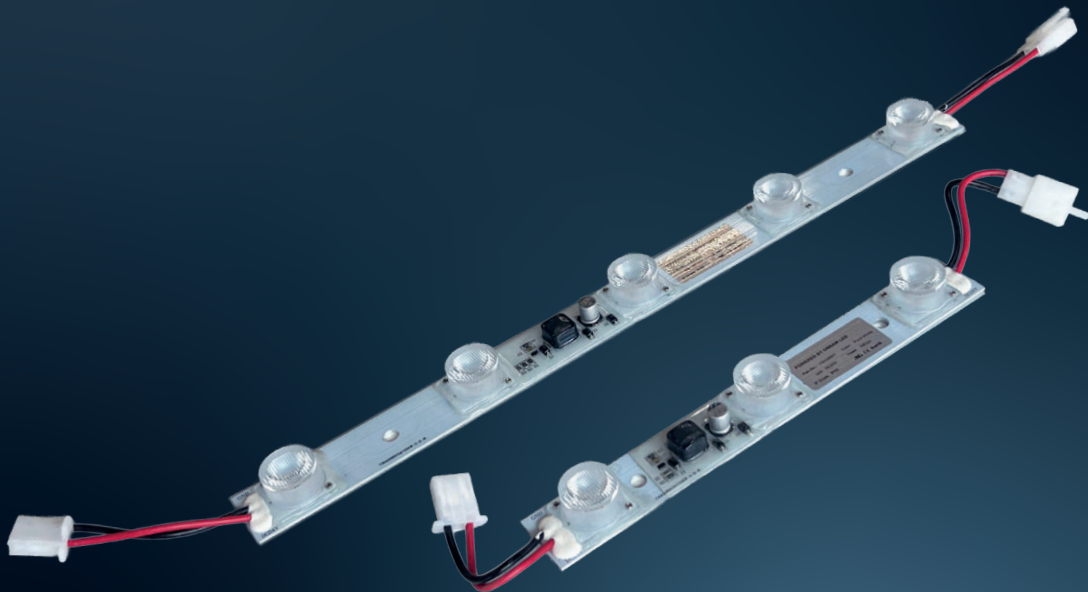

UVAL

Robust edgelit module for solid application in any type of frame to create excellent lightbox illumination.



3- pins connection - UVAL

Available in 3 / 5 Leds

- ✓ *LINKABLE UP TO 10 TIMES*
- ✓ *LENS SECURED WITH SCREWS*
- ✓ *PROTECTIVE PLASTIC LAYER*
- ✓ *ROBUST*




More information

Specifications

Power	15W	Input voltage	DC 24V
Luminous flux	1350 lm	Size	464 x 27 x 16 mm
Depth lightbox	100 - 150 mm	Mounting	Edgelit
Max. range	3000 mm	Beam angle	45 x 15°

VICI & UVAL connection & accessories

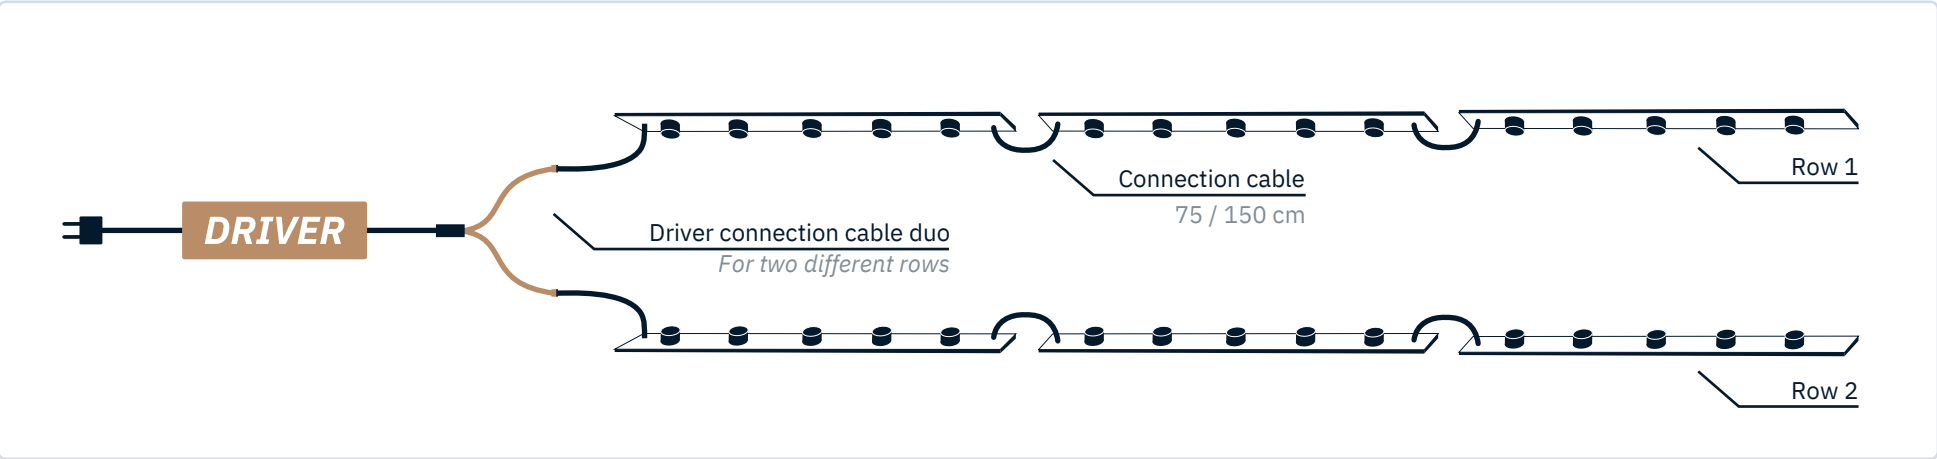

Driver Lightbox Slim
(75W / 120W)



Driver Meanwell
(240W)



Connection cable
(75 / 150 cm)



Driver connection cable
duo

Mounting :

Hammer nut with
Screw

Screw





YONI

Backlit module for a shallow lightbox. Thanks to the wide-angle lenses, the light is distributed very evenly at a short distance from the fabric.



2- pins connection - YONI

For shallow lightbox

- ✓ **WIDE BEAM ANGLE**
- ✓ **LINKABLE**
- ✓ **EASY TO CUT SHORTER**



More information

Specifications

Power	12W	Input voltage	DC 24V
Luminous flux	1200 lm	Size	960 x 20 x 7,2 mm
Depth lightbox	Max. 50 mm	Mounting	Backlit
Max. range	80 mm	Beam angle	170°

YONI connection & accessories



Connection cable
(75 / 150 cm)




Driver connection cable duo



Driver Lightbox Slim
(75W / 120W)



Driver Meanwell
(240W)

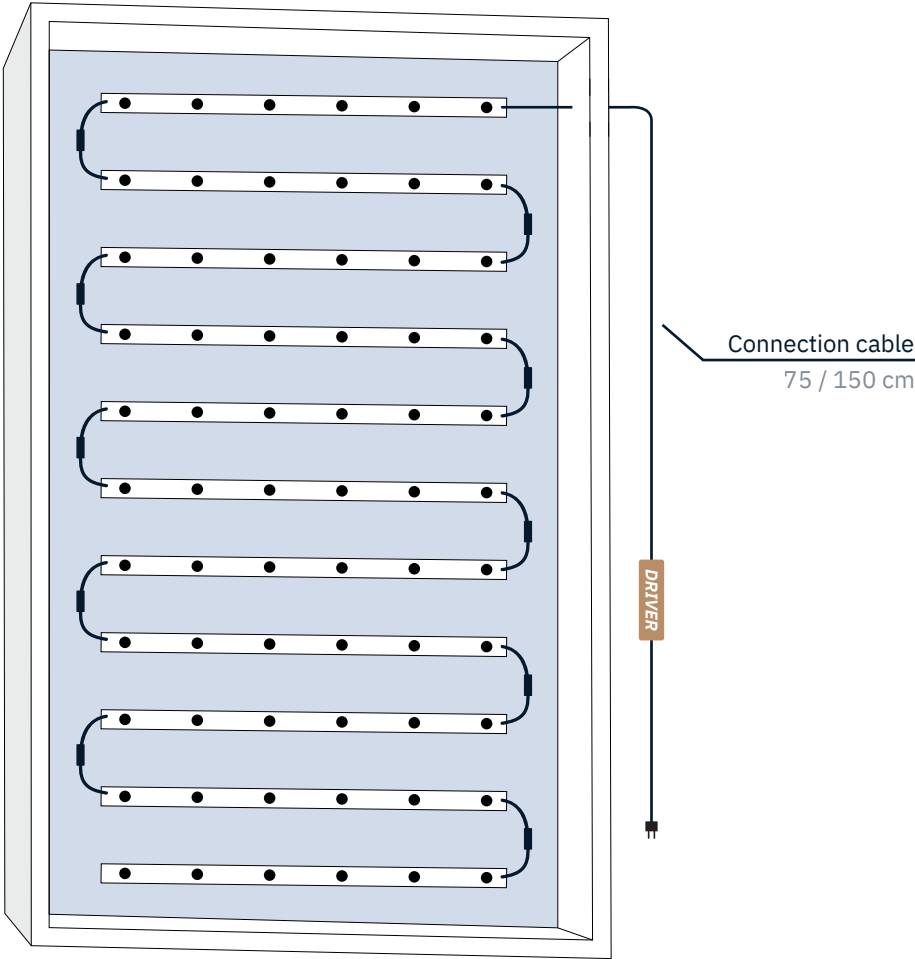

exposupply

Your key exhibition supplier

www.exposupply.com

www.exposupply.de

www.exposupply.fr

www.exposupply.nl